

Grind edges smooth according to AWS D1.1 Section 5.15.4.3


1/4" Dia cap screw, total 4
10 gauge Cover plate 7" x 5" with 1/8" neoprene gasket cemented to cover plate

PLAN

Elliptical handhole opening to match pattern provided
10 gauge Cover plate 7" x 5"
Drill & tap for 1/4" Dia cap screws
Handhole = \varnothing Pipe
Typical dimensions: 3/4" Typ, 3/4" Typ


ELEVATION

UPPER HANDHOLE AND COVER DETAILS




PATTERN OF ELLIPTICAL HANDHOLE CUT OUT

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
<p>May 1, 2006 PLANS APPROVAL DATE</p> <p>REGISTERED CIVIL ENGINEER Jeffrey B. Woody No. C41260 Exp. 3-31-07 CIVIL STATE OF CALIFORNIA</p> <p>The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.</p> <p>To get to the Caltrans web site, go to http://www.dot.ca.gov</p>					

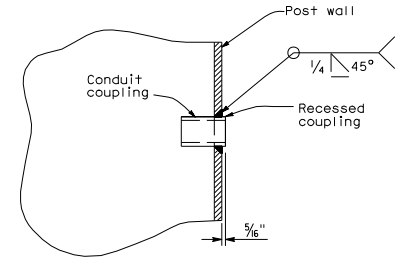

RECESSED COUPLING DETAIL

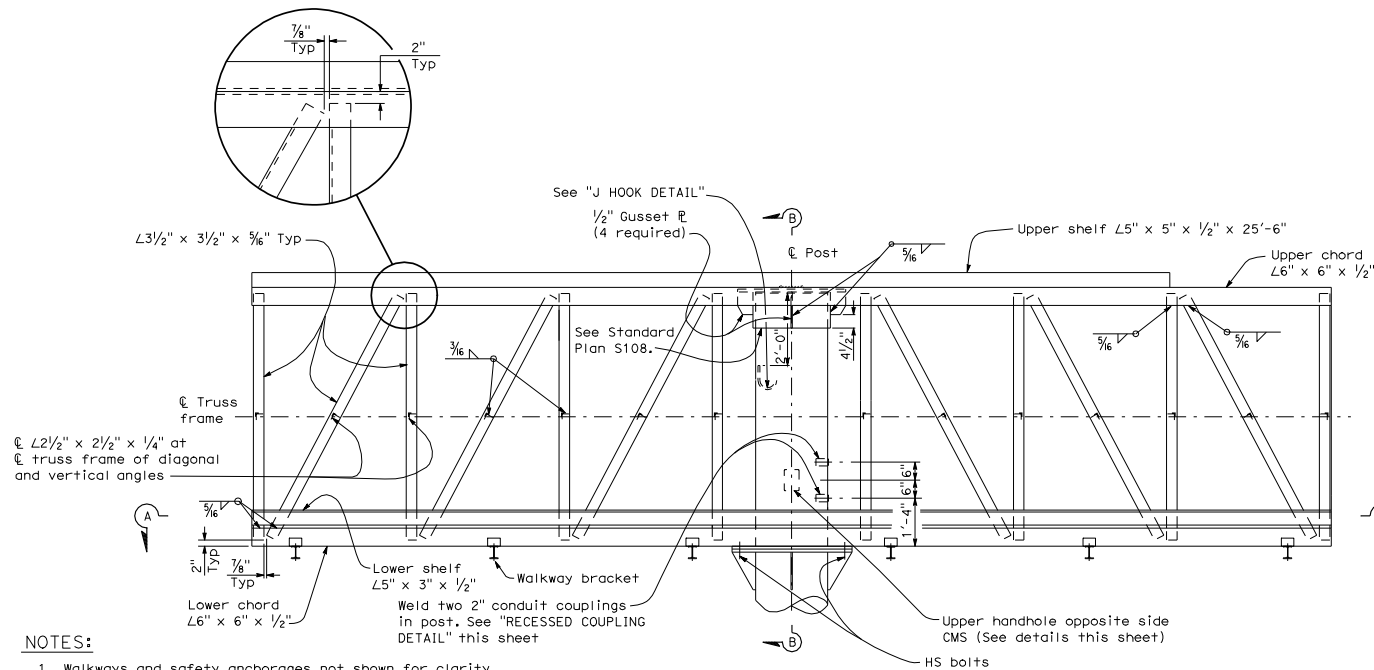


FRAME ELEVATION

See Note 1

NOTES:

1. Walkways and safety anchorages not shown for clarity.
2. For Section B-B details, see Standard Plan S108.
3. For Section A-A details, including vertical angle spacing, see Standard Plan S108.



J HOOK DETAIL

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

**OVERHEAD SIGN-TRUSS
SINGLE POST TYPE
STRUCTURAL FRAME DETAILS
BALANCED BUTTERFLY
CHANGEABLE MESSAGE SIGNS
MODEL 500**

NO SCALE

S106